



PLEATED FIBERGLASS COALESCER

Filtration Systems makes a wide range of fiberglass filter coalescers for natural gas purification.

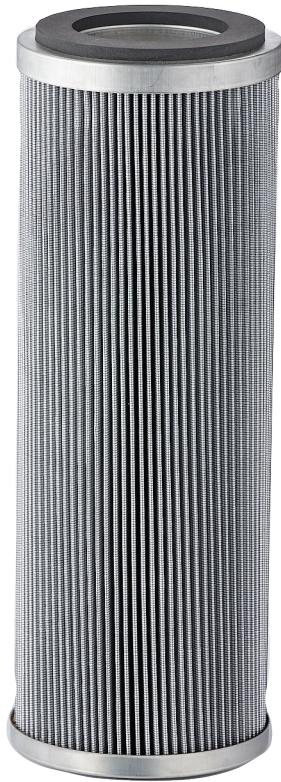

These filters are designed for inside-out flow, which enhances the coalescing process via velocity-reduction. The pleat pack is secured with a steel outer cage to prevent rupture.

- A** Buna-N or Viton gaskets provide positive seals against leakage.
- B** Welded steel cages prevent rupture.
- C** Polyester felt provides liquid drainage.
- D** Optional high strength center tubes.
- E** Multi-layered microfiberglass and synthetic media remove both solid and liquid contaminants.

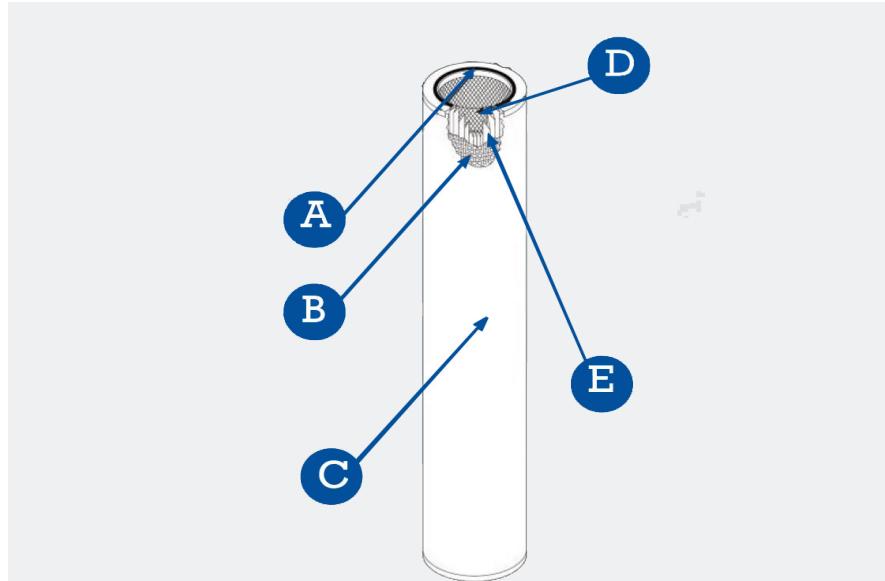



PART NUMBER CHART

(Example part number - other options available)

PFS-536-V-03-F-CE

MEDIA

DIAMETER	
-	3.65"
3	4.65"
5	5.48"
6	6"
7	6.88"

LENGTH

12"
24"
29"
30"
36"
72"

SPECIAL CONSTRUCTION	
CE	Closed Ended w/ bolt hole
EXT	Extention, one end
BR	Bridge, one end
DOR	Double O-Ring
NC	No Cover

Outer Wrap	
---	Cotton Sock
F	Polyester Felt

MICRON RATING	
03	.3μ Absolute
1	1μ Absolute

MICRON RATING	
B	Buna
V	Viton